

Projected Pupil Plane Pattern (PPPP) with artificial neural networks

Huizhe Yang,¹★ Carlos Gonzalez Gutierrez,² Nazim A. Bharmal¹★ and F. J. de Cos Juez²

¹Centre for Advanced Instrumentation, Department of Physics, University of Durham, South Road, Durham DH1 3LE, UK

²Mining Exploitation and Prospecting Department, University of Oviedo, C/Independencia n13, E-33004 Oviedo, Spain

Accepted 2019 May 11. Received 2019 May 7; in original form 2019 March 25

ABSTRACT

Focus anisoplanatism is a significant measurement error when using one single laser guide star (LGS) in an adaptive optics (AO) system, especially for the next generation of extremely large telescopes. An alternative LGS configuration, called Projected Pupil Plane Pattern (PPPP) solves this problem by launching a collimated laser beam across the full pupil of the telescope. If using a linear, modal reconstructor, the high laser power requirement (~ 1000 W) renders PPPP uncompetitive with laser tomography AO. This work discusses easing the laser power requirements by using an artificial neural network (NN) as a non-linear reconstructor. We find that the non-linear NN reduces the required measurement signal-to-noise ratio significantly to reduce PPPP laser power requirements to ~ 200 W for useful residual wavefront error (WFE). At this power level, the WFE becomes 160 nm rms and 125 nm rms when $r_0 = 0.098$ and 0.171 m respectively for turbulence profiles that are representative of conditions at the ESO Paranal observatory. In addition, it is shown that as a non-linear reconstructor, an NN can perform useful wavefront sensing using a beam-profile from one height as the input instead of the two profiles required as a minimum by the linear reconstructor.

Key words: instrumentation: adaptive optics – methods: numerical.

1 INTRODUCTION

Adaptive optics is a technology that corrects for the aberrations introduced by turbulence in the atmosphere and so improves the quality of the point spread function for ground-based astronomical observations (Hardy 1988). It becomes more important as the telescope diameter increases but the availability of stars with minimum brightness requirements to act as guide stars for wavefront sensor (WFS) measurements is independent of diameter. To overcome the lack of natural guide stars (NGSs), laser guide stars (LGSs) are deployed (Fugate et al. 1991) as a partial substitute. An LGS is created by a laser projected to form a compact beacon in the atmosphere and the light scattered back to the telescope is analysed with a dedicated WFS. For an LGS AO system, the key disadvantage is that high-altitude turbulence is illuminated by the LGS over a smaller region than the illumination from the scientific target because of the finite LGS altitude: the focus anisoplanatism problem (Hardy 1988). The wavefront error (WFE) from focus anisoplanatism becomes more pronounced for larger telescopes (Fried & Belsher 1994): ~ 155 nm rms if only one sodium LGS (~ 90 km altitude) is used on a 10 m telescope as described by Bouchez (2004), and $\gtrsim 300$ nm for 30-m-scale ELTs.

Laser tomography AO (LTAO) is the conventional solution to focus anisoplanatism by using several LGSs generated at different positions in the sky and then estimating the 3D turbulence (Tallon & Foy 1990). An alternative to LTAO is the Projected Pupil Plane Pattern (PPPP), which avoids the multiple-LGS-and-tomography solution, and so has several unique features compared to LTAO. First, turbulence is sensed during the projection of the laser beam, which is not focused but instead collimated and from the telescope primary mirror. This sampling of the atmospheric volume, equivalent to that illuminated by the target, by the laser beam is how the focus anisoplanatism is eliminated. Second, no WFS is required but instead a camera is used to image the back-scattered light as a beam-profile, implying an estimate of the beam-profile after propagation for a certain distance is the measurement. Third, the wavefront reconstruction does not employ tomography or require a priori knowledge of the turbulence profile. PPPP has been demonstrated as an effective solution to focus anisoplanatism using simulation and laboratory experiments (Yang, Bharmal & Myers 2018a and Yang et al. 2018b, respectively), and can achieve equivalent performance to a Shack–Hartmann (SH) WFS using a natural guide star. However, the linear reconstruction method used so far performs poorly when including photon noise (dependent on laser power) and detector read noise. According to Yang et al. (2018a), an ~ 1000 W laser is required for PPPP to reach a similar performance to the use of an SH WFS with a sodium LGS. To

* E-mail: huizhe.yang@durham.ac.uk (HY); n.a.bharmal@durham.ac.uk (NAB)

advance PPPP to the level of a practical alternative to LTAO, this work concentrates on using a non-linear reconstruction method, an artificial neural network (NN), to significantly reduce laser power requirements while retaining a useful WFE.

An NN is a machine-learning-based algorithm that has the ability to learn from different examples and extrapolate that knowledge to unseen data. They were traditionally inspired by human neurons (Rosenblatt 1958), but have been developed to form the deep learning models widely used today (LeCun, Bengio & Hinton 2015). Neural networks have been used with AO successfully on-sky, including recently to produce a tomographic reconstructor operating with multiple WFSs using an asterism of guide stars as described by Osborn et al. (2014). However, each potential asterism demands a different NN algorithm, which in turns leads to a set of time-consuming training processes. In contrast, applying the NN methodology for PPPP has the advantage that the laser beam is under control and so can be fixed: Once trained an NN-based reconstructor need not necessarily be retrained when changing the telescope pointing direction.

The layout of this paper is as follows. In Section 2 we review the PPPP theory and its conventional, linear reconstruction method. In Section 3 the neural network reconstruction methodology is described by using convolutional neural networks. In Section 4 simulation results are presented, comparing the performance of an NN-based reconstructor with that from using the linear reconstruction, and both against an NGS SH WFS, which is the baseline we aim for. In Section 5 we draw our conclusions.

2 PPPP THEORY AND LINEAR RECONSTRUCTION

2.1 PPPP theory

PPPP is reminiscent of a curvature WFS (Roddier 1988), since both are based on the relationship between phase and intensity by the transport-of-intensity equation (TIE),

$$k\partial_z I = -\nabla \cdot (I\nabla\phi), \quad (1)$$

which can be approximated as

$$k \frac{I_2 - I_1}{h_2 - h_1} = -\nabla \cdot (I_0 \nabla \phi) = -\nabla I_0 \cdot \nabla \phi - I_0 \nabla^2 \phi, \quad (2)$$

where I_0 , I_1 , and I_2 are the intensity patterns at the propagation distances of zero, $h_1 > 0$, and $h_2 > h_1$, respectively. The aberration ϕ can be located at $z \leq h_1$. From I_0 , I_1 and I_2 , we can retrieve the phase ϕ , except its mean (piston), according to equation (2). A PPPP schematic diagram is shown in Fig. 1. A laser beam is expanded to fill the pupil of the telescope and propagates as a collimated beam upward through the atmosphere. When the laser pulse reaches an altitude of h_1 , the light that then back-scatters to the surface is used to form an image of the beam-profile within the range gate Δh_1 using a camera conjugate to h_1 . This beam-profile, after calibration, is referred to in this work as I_1 . When some time later the laser pulse reaches an altitude of h_2 and is similarly scattered back, a second image is taken with a camera conjugate at h_2 to obtain I_2 . With the obtained calibrated beam-profiles I_1 and I_2 , we can retrieve the turbulence wavefront ϕ/k via equation (2). To have a finite range gate depth, a pulsed laser is required.

The description of how PPPP operates can be divided into three processes. First, a collimated beam is propagated upwards through the atmospheric turbulence from the telescope pupil plane to two altitude bins – the upward propagation. Then the back-scattered

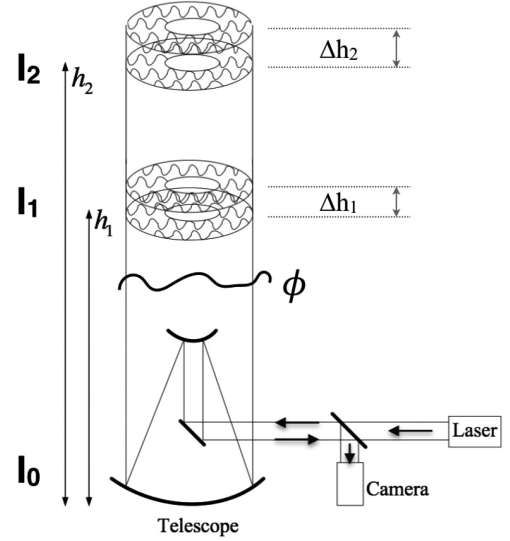


Figure 1. A schematic of how PPPP could be implemented. A collimated laser beam is propagated upward into the atmosphere from the whole telescope primary mirror, and encounters aberrations, ϕ . Light back-scattered from an altitude, h , is recorded to form I_1 when h is in the range $h_1 \pm \Delta h_1/2$ and similarly I_2 when h is in the range $h_2 \pm \Delta h_2/2$.

light from those altitude ranges is recorded as a beam-profile using either the same telescope or one nearby – the return path. And finally, the non-constant component of the aberrations encountered by using the subtraction of the beam-profiles is estimated – the reconstruction. A detailed description of how these processes were simulated together with results was presented in Yang et al. (2018a). It was demonstrated that the signal obtained using the PPPP method is generated during the upward propagation of the laser and that aberrations encountered in the return path can be neglected if the beam-profiles are measured at a sufficiently low angular sampling to allow seeing to be neglected.

2.2 Linear reconstruction

The reconstruction of phase, and therefore the wavefront, is by decomposition into Zernike polynomials, where Z_j is the j th Zernike polynomial (Noll 1975). The reconstructed phase $\hat{\phi}$ is then decomposed as

$$\hat{\phi} = \sum_{i=2}^{N_z+1} a_i Z_i(r, \theta),$$

if N_z Zernike polynomials are used for reconstruction (excluding piston).

The linear reconstruction algorithm was proposed by Gureyev & Nugent (1996). When the intensity distribution I_0 in equation (1) is smoothly approaching zero on the boundary of the pupil, then it is possible to introduce the matrix \mathbf{M} with its elements defined as

$$M_{ij} = \int_0^{2\pi} \int_0^R I_0 \nabla Z_i \cdot \nabla Z_j r dr d\theta, \quad (3)$$

where R is the radius of the pupil. Given \mathbf{M} , the reconstructed Zernike coefficient vector \vec{a} equals

$$a_j = R^2 \mathbf{M}^{-1} \vec{F}_j \quad \text{or} \quad \vec{a} = R^2 \mathbf{M}^{-1} \vec{F}, \quad (4)$$

where

$$F_j = kR^{-2} \int_0^{2\pi} \int_0^R \frac{I_2 - I_1}{h_2 - h_1} Z_j r dr d\theta. \quad (5)$$

Given I_0 , \mathbf{M}^{-1} can be formed in advance and then calculating F_j requires only a difference of the measured intensities, I_1 and I_2 , and an integration weighted by Z_j . To be consistent with Yang et al. (2018a),

$$I_0 = -0.1297 + \exp[-r^2/(2 \times 1.05^2)], \quad (6)$$

which satisfies the requirements (Gureyev & Nugent 1996) for using equation (3). This Gaussian-like beam-profile is shown in Fig. 3.

3 NEURAL NETWORK RECONSTRUCTION

Having discussed the methodology of the linear reconstructor, we now describe how an NN is developed to perform the equivalent task. A characteristic of an NN is its inherent ability to generalize from an a priori known set of inputs. By exposing an NN to these inputs, together with their desired outputs, the NN can predict an output when confronted with a superposition of a number of the independent training sets from combining a number of the synaptic pathways. Recently, the convolutional neural network (CNN) and increased computation power have together shown significant performance in different fields such as image classification (Krizhevsky, Sutskever & Hinton 2012), object detection (Sermanet et al. 2014), and speech recognition (Graves, Mohamed & Hinton 2013).

3.1 Convolutional neural networks

A neural network is composed of several layers of neurons, connected to each other in a feed-forward fashion. All the connections between neurons are called ‘weights’. As a sub-type of NNs, CNNs are characterized by the appearance of convolutional layers, which help in the extraction of features from an image. These layers are composed of several filters that are convolved with the input image, therefore generating a new set of processed images as outlined in Fig. 2. After the convolution, an activation function is applied. There are several types of functions, such as sigmoid or hyperbolic tangent, although the most common type is the rectified linear unit (ReLU; LeCun et al. 2015). It is common to use a pooling layer after the activation function, which reduces the size of the produced images, by extracting the maximum or median value from a certain region of pixels. This set of layers could be nested several times and will reduce the size of the processed input image, while increasing the number of processed images. The last stages of a CNN are fully connected layers that connect all the neurons from one layer to those in the next layer. These fully connected layers can be repeated as required, and the CNN ends with an output layer. To connect the convolutional stage with the fully connected layers, it is necessary to reduce the dimensionality of the images. This reduction is achieved by flattening the outputs of the convolution into a 1D vector. A summary of a complete CNN used for PPPP wavefront reconstruction is shown in Fig. 2.

A key stage in obtaining a usable NN is the learning, or training, process. By using a data set of known inputs and associated outputs, it is possible to calculate optimal values for the weights. Initially, the weights are random and an input is propagated through the network. The output of the CNN is computed and compared with the expected output, which results in a residual error. This error is back-propagated (Rumelhart, Hinton & Williams 1986) through

the network and the weights are updated accordingly. By iterating through the data set, this process is repeated and the weights are updated until the final input data has been seen: This process is called an ‘epoch’. Training is ended after a certain number of epochs when some suitable criterion to evaluate the network has been met (we discuss this further below). The CNN architecture has been demonstrated as particularly advantageous for image processing, and since the input is two beam-profiles, I_1 and I_2 , it is appropriate to be used in this work and referred to as ‘NN’ in the following.

3.2 NN implementation for PPPP

3.2.1 NN parameters

For PPPP, if we describe an NN as a ‘black box’ non-linear reconstructor, as shown in Fig. 3, then its inputs are two images of the scattered intensity patterns – beam-profiles – from two different altitudes, i.e. I_1 and I_2 . The expected output is a vector of 78 Zernike coefficients representing the reconstructed wavefront.

The NN reconstructor is composed of five convolutional layers and two fully connected layers at the end. The inputs, I_1 and I_2 , have dimensions of 64×64 pixels. The output of the reconstructor is \vec{a}' , the first 78 Zernike coefficients but scaled so their expected values, with respect to the training data set, are individually in the range ± 1 . This normalization improves the performance by a priori accounting for the large difference in the expected range between high- and low-order polynomials.

The NN is created using the TENSORFLOW (Abadi et al. 2015) software. Each convolutional layer applies two filters of 3×3 pixels to all images (except for the first layer, where four filters are applied), followed by a max pooling function that reduces each image size by half. At the end of the convolutional stage, there are 128 images of 2×2 pixels, which are flattened into a 1D vector of size 512. This vector is the input to the first fully connected layer, composed of 512 neurons, followed by the final output layer, which has 78 neurons. The activation function type is the Leaky ReLU (Maas, Hannun & Ng 2013), which improves the phase reconstruction by allowing non-zero values when the input is negative (Xu et al. 2015).

For the training process, the Adagrad back-propagation algorithm (Duchi, Hazan & Singer 2011), has been used, along with a batch size of 128 samples. The error of the back-propagation is calculated using the root mean squared error (RMSE). Initial experimentation suggests a learning rate of 0.01 as a good compromise between the speed and correct outputs. Initial values of the weights are set by Xavier initialization (Glorot & Bengio 2010), which has been demonstrated as an improvement over the Gaussian initialization.

3.2.2 Training data set

During the training process it is necessary to expose the NN to a large number of pairs of inputs and desired outputs. This training data set should cover the full range of possible scenarios, and previous experiments in atmospheric wavefront reconstruction show that an NN can accurately predict an output when trained with a superposition of independent training sets (Osborn et al. 2014). The conclusion is that not every possible turbulent profile is required but instead a basis set is sufficient for training. Such a basis set for PPPP is now described.

Table 1 shows the parameters used to generate the training data set from the PPPP model in an AO simulation platform SOAPY (Reeves 2016), including the upward propagation, return path, and

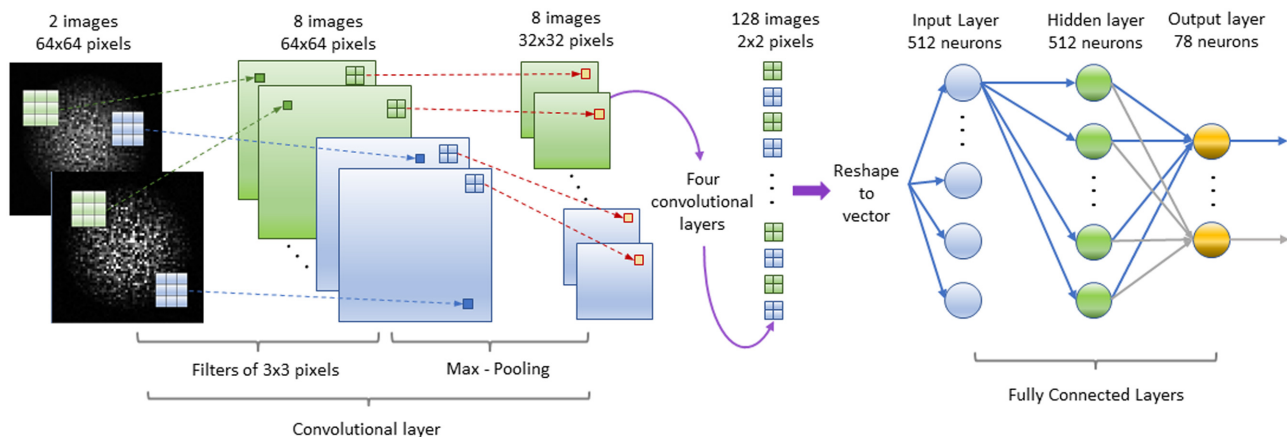


Figure 2. Convolutional neural network diagram. The two input images are convolved by four filters of 3×3 pixels, creating 64 images. After this pooling is applied to each image, the image size is reduced by half. This process is repeated four times but using only two filters per layer, creating 128 images of 2×2 pixels which are flattened and passed as inputs to the fully connected stage. At the end the 78 Zernike coefficients are returned as the output.

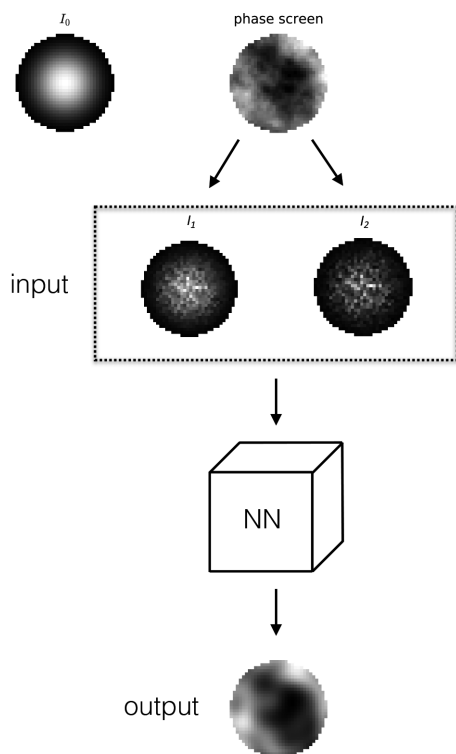


Figure 3. Schematic diagram of the generation of PPPP signal and NN reconstructor as a black box. A Gaussian-like beam at the pupil I_0 propagates through a random phase screen to h_1 and h_2 , forming images I_1 and I_2 , respectively. The input for the NN reconstructor then is the two images I_1 and I_2 and the output is the reconstructed 78 Zernike coefficients (here shown as the reconstructed phase for convenience).

reconstruction according to Yang et al. (2018a). The tip/tilt modes are excluded from both input phase screens and reconstructed Zernike coefficients because the tip-tilt signal, a global movement of the beam-profile, is also affected by the return path. As with the use of an LGS, it is necessary to use an NGS to provide the tip-tilt information. The parameters are chosen to balance the PPPP performance and complexity. Four sets of training data were created,

Table 1. PPPP parameters for training data set. D is the telescope diameter. The number of pixels across the selected square to pad the pupil is N_{total} , to reduce edge effects during propagation, and N_{pupil} is the number of illuminated pixels across the pupil. The transmission of the optical components is T_0 , and T_A is the one-way transmission of the atmosphere. The outer and inner scale are L_0 and l_0 , respectively. The laser pulse length is Δh_1 and Δh_2 for h_1 and h_2 , respectively. I is the average laser power and η is the quantum efficiency of the photon detector.

Simulation	Turbulence
$D = 4$ m	One turbulence layer
$h_1 = 10$ km	Altitude: 0 to 10 km
$h_2 = 20$ km	r_0 : 0.08 to 0.28 m (at 500 nm)
$N_{\text{total}} = 64$	$T_0 = 0.5$; $T_A = 1$
78 Zernike modes	$L_0 = 100$ m; $l_0 = 0.01$ m
Gaussian-like beam I_0	
laser	camera
$\lambda = 1064$ nm	$N_{\text{pupil}} = 54$
$\Delta h_1 = 1$ km; $\Delta h_2 = 5$ km	$\eta = 0.8$
I (W): 10, 20, 200, and infinite	Read noise: $3e^-$
Laser frequency: 5 KHz	Exposure time: 2.5 ms

each with a constant laser power: 10, 20, 200 W and infinite power (photon noise-free). For each power simulated, 100 altitudes for one turbulence layer, h , distributed between 0 and 10 km are defined, with 10 values of r_0 between 0.08 and 0.28 m per turbulence layer altitude and 300 realizations of a random phase screen for each r_0 value. Thus, for each turbulence altitude, there would be 3000 pairs of beam-profiles for training. This leads to 300 000 pairs of beam-profiles for each laser power, including 100 turbulence layer altitudes, with each pair created from a well-defined r_0 and h value: This is the basis set. These data can be used to train four different neural networks, each for a specific laser power, or used together to train one combined neural network, which is laser power agnostic.

3.2.3 Discussion

During training, it is necessary to use early-stopping techniques to avoid overfitting the neural network to the training data. Within several thousands of epochs, the computed RMSE used to back-

propagate through the NN kept decreasing. However, the residual wavefront error from an AO simulation (see the next section for details) using the NN models of different numbers of epochs stops decreasing. This occurs when the NN is overfitted to a specific laser power, and the simulation reveals this by a corresponding increase in WFE for other laser powers. It is evident that the reconstruction quality deteriorates when overfitting. To avoid overfitting, the training process is therefore ended after 1000 epochs.

One of the advantages of NNs is the flexibility of their topology (internal configuration of layers) when altering the size of the input or output. If such an alteration is performed then usually it is only necessary to retrain the network rather than having to redesign its topology. Although the linear reconstructor requires at least two beam-profiles as inputs, the NN can be adapted and then trained with only one beam-profile from one altitude (see Section 4.3 for details). For this specific case, the modifications are only to the first convolutional layer, which then has eight filters instead of four. The other parameters and architecture are unchanged.

4 RESULTS

4.1 Suitability for real-time operation

The number of operations for each reconstruction method is now discussed to highlight suitability for real-time use. For the NN, reconstruction is calculated network layer by layer. In the convolutional stage, each image is multiplied with all the filters. The amount of calculations required for each subsequent convolutional layer is reduced substantially when propagating through the NN; hence, the convolution operations dominate. In the fully connected layers the number of operations is equal to the product of the number of input neurons by the number of output neurons. The total number of arithmetic operations for the NN reconstruction is therefore estimated as $\sim 875\,000$. In comparison, the linear reconstructor uses a matrix vector multiply operation (the reconstruction matrix of size N_z^2 is multiplied with a measurement-related vector \mathbf{F} , which is a length N_z vector). This makes the matrix–vector multiplications require $O(N_z^2)$ number of calculations. However, the formation of \mathbf{F}_j requires pixel-by-pixel processing for $N_p = \pi(N_{\text{pupil}}/2)^2 \approx 2300$ per beam-profile. This is $O(2N_zN_p)$ for two beam-profiles and so dominates the number operations. It is estimated that $\sim 365\,000$ operations are required for the linear reconstruction. Therefore, the NN is only ~ 2 times more computationally complex than the linear method and the processing of the input data, I_1 and I_2 , dominates in both methods.

4.2 Validation of the NN reconstructor

For the validation two representative optical turbulence profiles measured at Cerro Paranal (Farley et al. 2018) are used, with r_0 equalling 0.0976 and 0.171 m, respectively. The turbulence profiles are shown in Fig. 4. Both the profiles are consistent with long-term statistical analysis (Laidlaw et al. 2018): Turbulence at the ground is dominant and there are several peaks between 5 and 20 km. Comparing these two profiles, we find that there is a stronger ground layer for the $r_0 = 0.0976$ profile, while the turbulence layer around 20 km is stronger for the $r_0 = 0.171$ m profile. These two profiles were chosen since their r_0 values cover the worst and best seeing from 83 nights at ESO Paranal, with the probability percentage of their occurrence equalling 9.7 per cent and 1.4 per cent.

To validate the NN reconstructor, it was included into SOAPY, which is a Monte Carlo adaptive optics simulation written in the PYTHON programming language (Reeves 2016), with an

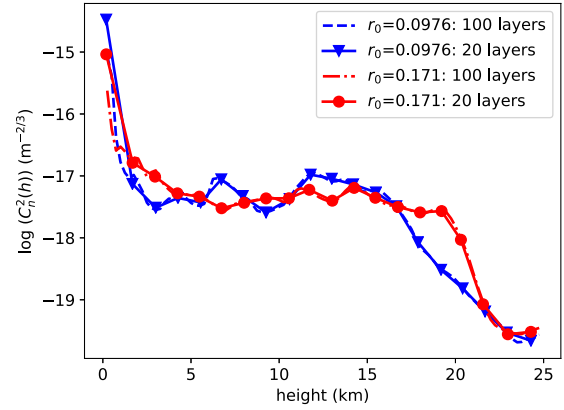


Figure 4. Two representative optical turbulence profiles measured at ESO Paranal from Farley et al. (2018) with r_0 equalling 0.0976 and 0.171 m. They have both 100- and 20-turbulence-layer representations; the 20-layer representation is used in this work.

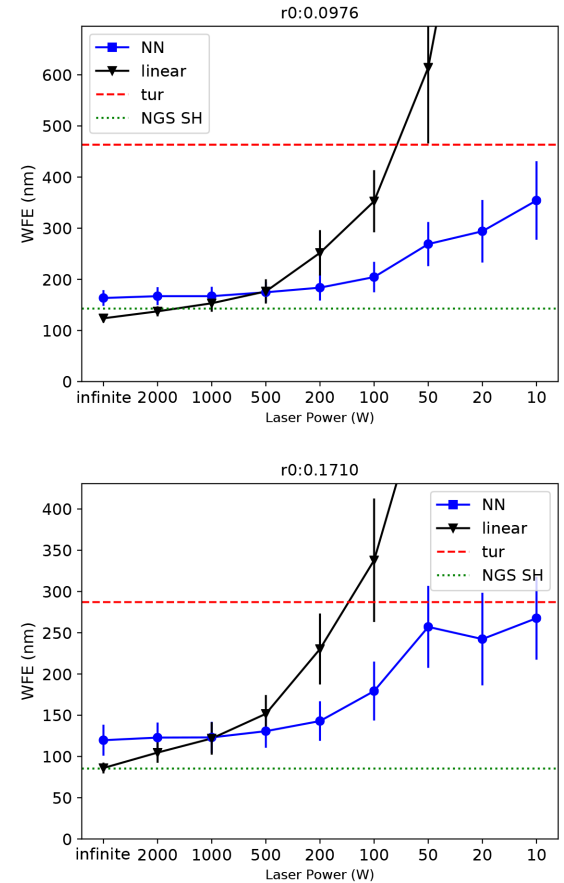


Figure 5. The WFE (nm) of the linear and NN reconstructors with different laser powers. ‘NGS SH’ shows the ideal performance and ‘tur’ represents the rms of the uncorrected wavefront. The result is an average of 50 random turbulence realizations from the SOAPY simulations.

integrated PPPP simulation model (Yang et al. 2018a). For a wavefront-sensing comparison with PPPP, a zero-noise SH WFS associated with an infinitely bright NGS is implemented with 26×26 sub-apertures. The synthetic DM in the simulation can reproduce, exactly, the first 78 Zernike polynomials. The simulation is configured to run in open loop.

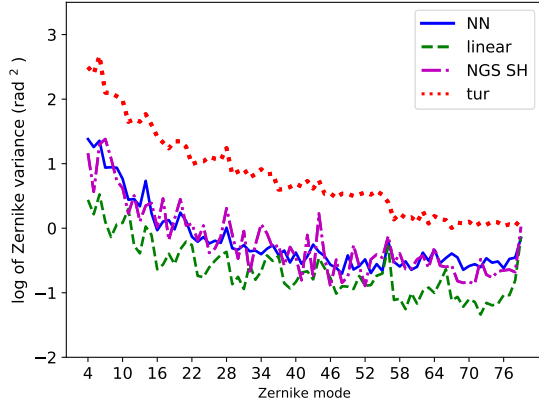
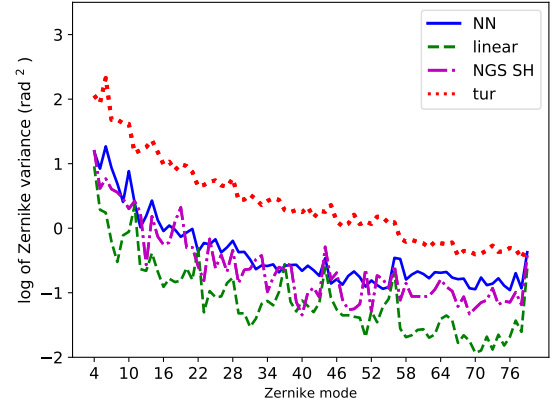
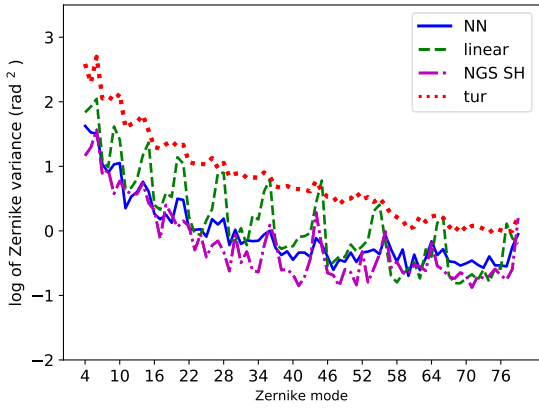
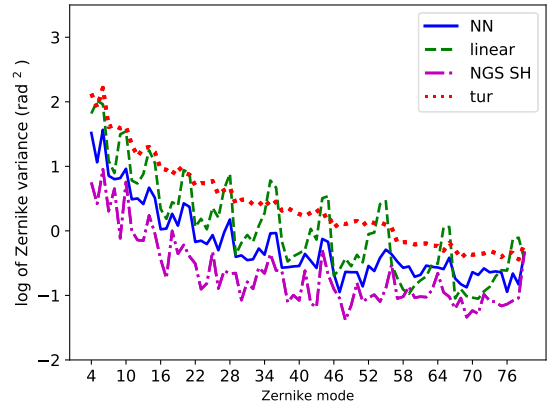
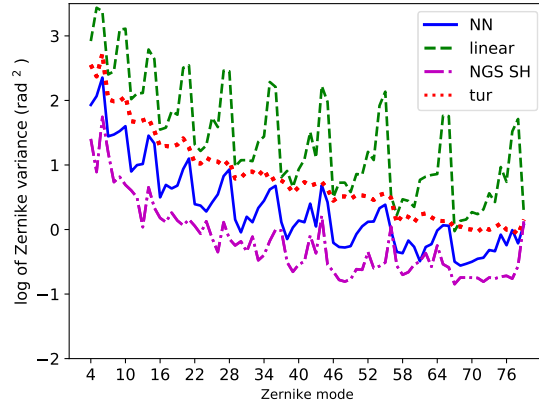
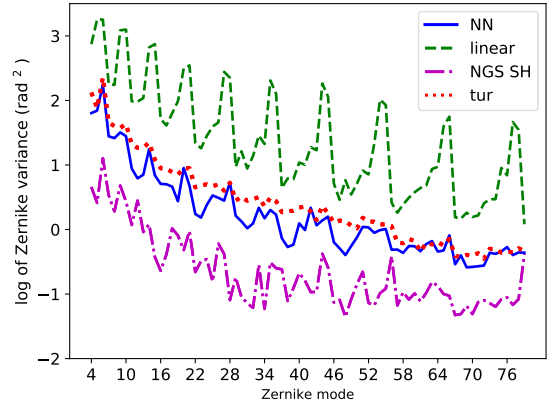

 (a) $r_0=0.0976$ m; infinite power

 (b) $r_0=0.171$ m; infinite power

 (c) $r_0=0.0976$ m; 200 W

 (d) $r_0=0.171$ m; 200 W

 (e) $r_0=0.0976$ m; 20 W

 (f) $r_0=0.171$ m; 20 W

Figure 6. Residual variance of the Zernike coefficients for the linear and NN reconstructors from the AO simulation for different laser powers and for the two turbulence profiles, (left) $r_0 = 0.0976$ and (right) $r_0 = 0.171$ m. The ‘NGS SH’ lines show the idealized performance from a noiseless SH WFS and the ‘tur’ lines are the uncorrected Zernike coefficient variances. Zernike mode is synonymous with Zernike polynomial.

Initially, we discuss the NN after it is trained with all laser powers. From the two turbulence profiles shown in Fig. 4 and the PPPP parameters listed in Table 1, the average wavefront error is obtained from 50 random turbulence realizations per profile. The results for different laser powers (varying photon noise in the measured beam-profiles) are shown in Fig. 5. It is found that the NN reconstructor can significantly reduce the residual wavefront error when the laser power is less than 1000 W, which in turn reduces the laser power requirements for implementation. As expected, for both the linear and NN reconstructors, with larger WFE the corresponding standard deviation increases. Comparing $r_0 = 0.0976$ m and $r_0 = 0.171$ m, we find that the intersection of the two reconstructors is around 500 W for $r_0 = 0.0976$ m and 1000 W for $r_0 = 0.171$ m. It means that the linear reconstructor performs better, relatively, for poorer seeing (smaller r_0). For the linear reconstructor, equation (2) implies the signal, proportional to $I_2 - I_1$, is a linear function of the phase and therefore larger for poorer seeing. However, the NN reconstructor is not as sensitive to the seeing, which suggests that the NN is using I_1 and I_2 independently and not their difference directly. The intriguing suggestion is that sufficient information for reconstruction is contained within each beam-profile, and this is discussed further below.

To understand the source of discrepancy in reconstructor performance, the reconstructed Zernike coefficients are shown in Fig. 6, which shows the AO-corrected Zernike coefficient variance for laser powers equalling 20 W, 200 W, and infinity and for both profiles. For all three wavefront-sensing configurations (PPPP NN, PPPP linear, and NGS SH), with no photon noise (top row) the residual is consistent with a constant fractional error. The linear PPPP retrieval, however, has a suggestion of structure consistent with smaller residuals for Zernike polynomials with smaller azimuthal frequency. This structure becomes clear when a 200 W laser is simulated for both PPPP reconstructors, although it is weaker for the NN. For the lowest laser power, 20 W, the correlation between the Zernike azimuthal frequency and coefficient variance becomes clear for both the PPPP reconstructors. However, the NN always gives a result with $\text{SNR} \geq 1$, and therefore a useful retrieval, while the linear reconstructor has $\text{SNR} \leq 1$ and is therefore a useless retrieval. In comparing the two profiles, there is some evidence that the residuals from the NN reconstructor are more closely related to the variance from the SH – which only measures $\nabla\phi$ – than the linear reconstructor. Therefore, it is possible that the NN pre-processing is able to enhance this signal and therefore mitigate noise effects at the potential expense of the signal otherwise available to the linear reconstructor. Such analysis to confirm this hypothesis is beyond the scope of this paper.

The NN reconstructor used so far is trained from the combined data sets of 10 W, 20 W, 200 W, and infinite laser power, which results in 1 200 000 independent combinations of inputs and outputs. Using this NN we demonstrate that the reconstructor has slightly worse performance (168 nm WFE rms for $r_0 = 0.0976$ and 120 nm for $r_0 = 0.171$ m) than the linear reconstructor (125 nm WFE rms for $r_0 = 0.0976$ and 86 nm for $r_0 = 0.171$ m) for infinite laser power, but much better performance for laser powers ≤ 500 W (see Fig. 5). The intensity of the measured beam-profile can change from laser power declining through lifetime effects or from the opacity of the atmosphere changing. The NN model used so far therefore has the advantage of being insensitive to the number of photons detected. The alternative scenario is fixing the laser power during training the NN. The result is that the performance from a single-power-trained NN is only slightly better than that from the multiple-power-trained NN but only for the specific training laser power. Table 2 gives the

Table 2. WFE (nm) for different models using different training data sets. The first three rows use an NN trained with laser power equalling only 20 W, only 200 W, or a combination (10 W, 20 W, 200 W, and infinity). The WFE of the linear reconstructor and NGS SH are shown for comparison, as well as the uncorrected turbulence rms.

Data set	Validation laser power					
	$r_0 = 0.0976$ m			$r_0 = 0.171$ m		
	∞	200 W	20 W	∞	200 W	20 W
200 W	137	160	1160	92	125	1146
20 W	305	324	282	235	231	219
Combined	168	178	281	120	147	236
Linear	125	248	1132	86	226	1171
NGS SH		142			86	
Turbulence		460			290	

corresponding WFEs, suggesting 160 nm rms when $r_0 = 0.0976$ m and 125 nm rms when $r_0 = 0.171$ m for a 4-m telescope if a 200 W laser is used. If error sources such as the fitting and temporal errors are ignored and the tip/tilt is compensated for perfectly then the expected Strehl ratio is 0.67/0.58 in the J band for $r_0 = 0.171$ m when using a single/multiple-power-trained NN reconstructor.

4.3 Using one beam-profile to train the NN

As discussed earlier, the trained NN reconstructor did not appear to use the difference of beam-profiles but instead I_1 and I_2 independently. Furthermore, an NN can be trained with just one beam-profile, which suggested an experiment: Can such an NN reconstructor produce a meaningful signal from turbulence distributed along the direction of laser propagation? We trained a single-beam-profile NN reconstructor as described in Section 3.2.3 with either I_1 or I_2 as the input component of the data sets. Both of the training data sets for 20 W and 200 W power were used. The corresponding results for a I_1 -only reconstructor are shown in Fig. 7 (results from training with I_2 are worse and hence not discussed further). Encouragingly, the I_1 -only NN reconstructor shows a better performance in the simulation than the linear reconstructor – which requires both I_1 and I_2 – for laser powers below 200 W. This result points towards a simplified on-sky implementation for PPPP with an NN reconstructor wherein the camera shutter need only be required to have an open/close repetition rate per pulse (millisecond rates) rather than twice within a pulse (tens of microsecond rates).

5 CONCLUSIONS

We have shown that a convolutional neural network can improve the performance of PPPP significantly when the laser power is below 1000 W. Specifically we have tested the NN reconstructor using two representative turbulence profiles measured at ESO Paranal. The averaged WFEs for each profile when using the NN reconstructor are 160 nm and 125 nm rms, respectively, if a 200 W laser is used and tip/tilt is assumed to be perfectly compensated for. These WFEs lead to J -band Strehl ratios equal to 0.52 and 0.67, respectively, compared to 0.21 and 0.28 if otherwise the linear reconstructor was used. Apart from the improved performance, another advantage of using an NN together with PPPP is that the laser beam-profile is under control, unlike tomographic NGS AO, for example, which is dependent on a specific asterism for a specific target. Thus, there is no need to retrain the PPPP NN reconstructor unless the laser beam-profile is changed. Considering the increased computational

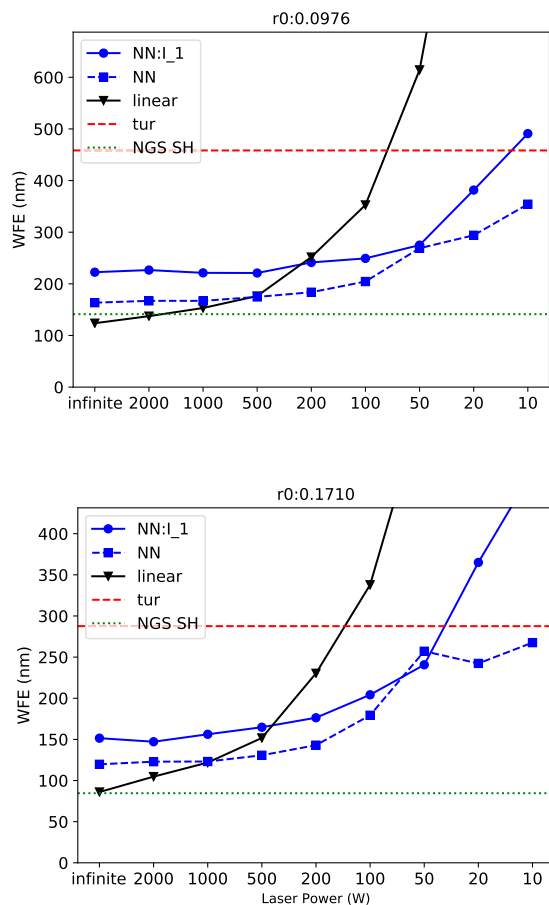


Figure 7. The WFE (nm) of a I_1 -only reconstructor. ‘NN: I_1 ’ represents the NN model trained with only I_1 and ‘NN’ represents the model trained with both I_1 and I_2 (see Fig. 5). The ‘NGS SH’ shows the ideal performance. The result is an average of 50 random turbulence realizations from the SOAPY simulations.

cost for an NN, the training process is anticipated to be offline and hence not considered here, but the real-time consideration is that the NN reconstructor requires only $\sim 2\times$ more operations than the linear reconstructor. Hence, the cost of using an NN reconstructor is not substantially increased. Finally, the first results of using the NN reconstructor trained with one beam-profile shows a smaller WFE for laser powers below 200 W when compared with the linear reconstructor that demands two beam-profiles. The on-sky implementation complexity when measuring one beam-profile is significantly reduced, and only becomes possible by utilizing an NN reconstructor.

ACKNOWLEDGEMENTS

Authors from Durham University acknowledge STFC funding ST/P000541/1. Authors from Oviedo University acknowledge financial support from the I + D 2017 project AYA 2017-89121-P, and support from the European Union’s Horizon 2020 research and innovation programme under the H2020-INFRAIA-2018-020 grant agreement No210489629.

REFERENCES

- Abadi M. et al., 2015, 1603.04467, CoRR
- Bouchez A., 2004, in Calia D. B., Ellerbroek B. L., Ragazzoni R., eds, Proc. SPIE Conf. Ser. Vol. 5490, *Advancements in Adaptive Optics*, SPIE, Bellingham, 321
- Duchi J., Hazan E., Singer Y., 2011, *J. Mach. Learn. Res.*, 12, 2121
- Farley O. J. D., Osborn J., Morris T., Sarazin M., Butterley T., Townson M. J., Jia P., Wilson R. W., 2018, *MNRAS*, 481, 4030
- Fried D. L., Belsher J. F., 1994, *J. Opt. Soc. Am. A*, 11, 277
- Fugate R. Q. et al., 1991, *Nature*, 353, 144
- Glorot X., Bengio Y., 2010, Understanding the difficulty of training deep feedforward neural networks, *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*, Italy, p. 249
- Graves A., Mohamed A.-r., Hinton G., 2013, 1303.5778, CoRR
- Gureyev T. E., Nugent K. A., 1996, *J. Opt. Soc. Am. A*, 13, 1670
- Hardy J., 1988, *Adaptive Optics for Astronomical Telescopes*. Oxford Univ. Press, Oxford
- Krizhevsky A., Sutskever I., Hinton G. E., 2012, *Advances in Neural Information Processing Systems*, Curran Associates, Inc., p. 1097
- Laidlaw D. et al., 2018, *MNRAS*, 478, 825
- LeCun Y., Bengio Y., Hinton G., 2015, *Nature*, 521, 436
- Maas A. L., Hannun A. Y., Ng A. Y., 2013, 30, *ICML workshop on Deep Learning for Audio, Speech and Language Processing*, p. 3
- Noll R. J., 1975, *J. Opt. Soc. Am.*, 66, 207
- Osborn J. et al., 2014, *MNRAS*, 441, 2508
- Reeves A., 2016, in Marchetti E., Close L. M., V´eran J. P., eds, Proc. SPIE Conf. Ser. Vol. 9909, *Adaptive Optics Systems V*. SPIE, Bellingham, p. 99097F
- Rodier F., 1988, *Appl. Opt.*, 27, 1223
- Rosenblatt F., 1958, *Psychol. Rev.*, 65, 386
- Rumelhart D. E., Hinton G. E., Williams R. J., 1986, *Nature*, 323, 533
- Sermanet P., Eigen D., Zhang X., Mathieu M., Fergus R., Lecun Y., 2014, *International Conference on Learning Representations (ICLR2014)*, CBLS
- Tallon M., Foy R., 1990, *A&A*, 235, 549
- Xu B., , Wang N., Chen T., Li M., 2015, CoRR, abs/1505.00853
- Yang H., Bharmal N. A., Myers R. M., 2018a, *MNRAS*, 477, 4443
- Yang H. et al., 2018b, in Proc. SPIE Conf. Ser. Vol. 10703, *LGS Alternative Wave-Front Sensing: Projected Pupil Plane Pattern (PPPP)*. SPIE, Bellingham, p. 107030Q

This paper has been typeset from a \LaTeX file prepared by the author.